



Log splitter

HF-125, HT-130, HF-180 and HT-200

Wide log splitters of types HF-125 and HF-180 are equipped with a patented one-hand operation system as standard. Due to their special splitting length of 124 cm you can easily split wood with excess length. A special table with a patented foot control has been developed for splitting short wood. Two different splitting speeds as well as the kneeling of the cylinder to transport position are also included as standard. The log splitter HF-180Z has a Speed-Power-function which regulates the speed automatically. A time saving of 20-25% is possible. A robust torsion-secure frame with a double-sided cylinder conduction assures a safe use while splitting wood.

Splitting of wood with excess length is no problem due to the unique system!

Types overview

Technical information

Design model	Log splitter HT-125 E	Log splitter HT-125 Z	Log splitter HT-125 K	Log sp
Drive	Electric engine 4,0 KW, 400 Volt	PTO gear	Electric engine 4,0 KW combined with a power take-off gear	PTO g
Splitting strength:	12,5 t	12,5 t	12,5 t	18 t
Splitting height	1240 mm	1240 mm	1240 mm	1240 mm
Splitting time	5/16 cm/sec	9/29 cm/sec	5/16 cm/sek. 9/29 cm/sek.	8/17 c
Engine speed	14000 rpm	540 rpm	1400/540 rpm	540 rp
Oil volume	22 liter	22 liter	22 liter	23 lite
Three-point suspension	no	yes	yes	yes
Wheel set 400 mm ø	yes	no	no	no
Weight	310kg	290 kg	330 kg	353 kg
Tractor power requirements	---	15 HP	15 HP	20 HP
Item number	16.194	16.192	16.196	16.18



Log splitter HF-125 E



Log splitter HF-125 Z

Log splitter HT-180 Z	Log splitter HT-180 K	Log splitter HT-130 Z	Log splitter HT-130 H	Log splitter HT-200 Z	Log splitter HT-200 K
Power gear	Electric engine 5,5 KW combined with a power take-off gear	PTO gear	Hydraulic system	PTO gear	Electric engine 5,5 KW combined with a power take-off gear
Capacity	18 t	13 t	13 t	20 t	20 t
Blade length	1240 mm	1070 mm	1070 mm	1240 mm	1240 mm
Blade speed	8/17 cm/sek.	9/29 cm/sek.	9/29 cm/sek.	8,5/19,5 cm/sek.	8,5/19,5 cm/sek.
Engine speed	1400/540 rpm	540 rpm	---	540 rpm	1400/540 rpm
Fuel tank	23 liter	22 liter	---	28 liter	28 liter
PTO	yes	yes	yes	yes	yes
PTO gear	no	no	no	no	no
Weight	410 kg	245 kg	190 kg	380 kg	475 kg
Power	20 HP	15 HP	15 HP	25 HP	25 HP
Model	16.185	16.132	16.134	16.200	16.203



Log splitter HT-130 H



Log splitter HF-180 Z



Log splitter HT-200 Z

Further information




Cross splitter HF – 130



Splitting wedge broadening HT-130

- The log splitter type HF-125 distinguishes itself through its enormous splitting length of 124 cm as well as its easy control of running in and out.
- The log splitter type HT-130 is characterised by its robust three-point suspension as well as by the high speed rewind.
- The log splitter type HF-180 is unbeatable due to its Speed-Power-Function, which allows a time saving of 25-30% because of the self-regulated splitting speed.
- An easy running-in and -out of the cylinder is possible without help of any tools.

Accessories	item number
Cross splitter HF – 125	16.448
Splitting wedge broadening HF-125	16.450
Cross splitter HF-180	16.452
Short wood table HF-125/HF-180	16.444
Trunk lifter HF-125/HF-180	16.480
Cross splitter HF – 130	16.448
Splitting wedge broadening HT-130	16.450
Short wood table HT-130	16.462
Cross splitter HT-200	16.420
Short wood table HT-200	16.460
Trunk lifter HT-200	16.484
Universal joint shaft	14.692

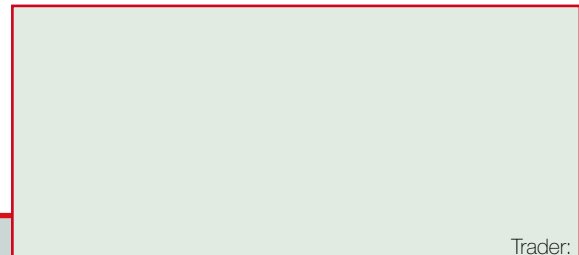

Technical and optical alterations are possible

Trader: